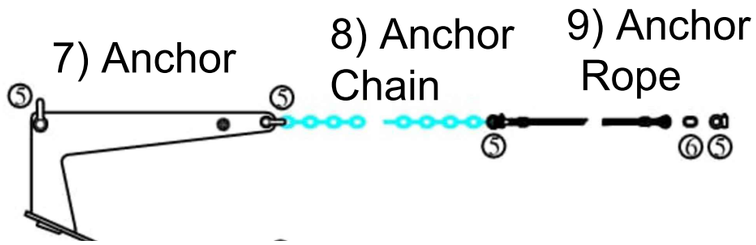

Mooring Ring

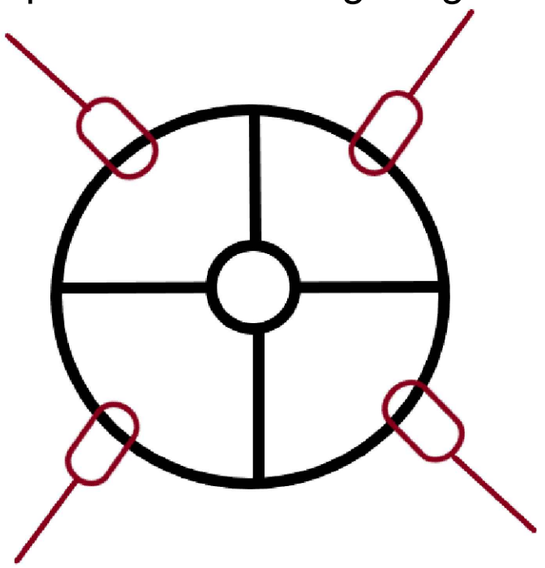

1) Mooring Ring Plan

1) Mooring Ring

PROJECT TITLE: Hawks Nest T9 / 127 - AQ180 Layout	CLIENT: Ardbear SeaFarms Ltd
	DATE: March 2022 / DRAWN BY: EOM
DRAWING TITLE: Components Details	SCALE: As Shown @A3
	PROJECT NO: 1958 / DRAWING NO: PP-13(c) / REVISION NO: 01

Notes:
This drawing and any design hereon is copyright and must not be reproduced without written conscent.
DO NOT SCALE from drawing use figured dimensions only
All dimensions to be checked on site and any discrepancies reported immediately before work proceeds.
All Dimensions in mm unless stated.

O'MCE
Enda O'Malley B.Eng C.Eng MIEI
Bridge Street
Clifden
Co. Galway
Tel: 095 22536
Mob: 086 3567851
Email:endaomalley@gmail.com

SPECIFICATION REQUIREMENTS

Mooring ring - 40T Breaking load / 12kg weight diameter 457mm, thickness46mm.
Buoy Chain - 5m x 22m long-link Galvanised / Break load 46T
Buoy - 1000ltr cylindrical or similar
Bridle Rope - 36mm Danline Polysteel
Mooring Shackles - 12T Bow Shackles
Masterlinks - Yellow or Galvanised
Anchor 500kg
Anchor Chain - 32mm stud-link chain / Break load 20.8T
Anchor Rope - 40mm danline polysteel break load 20.8T