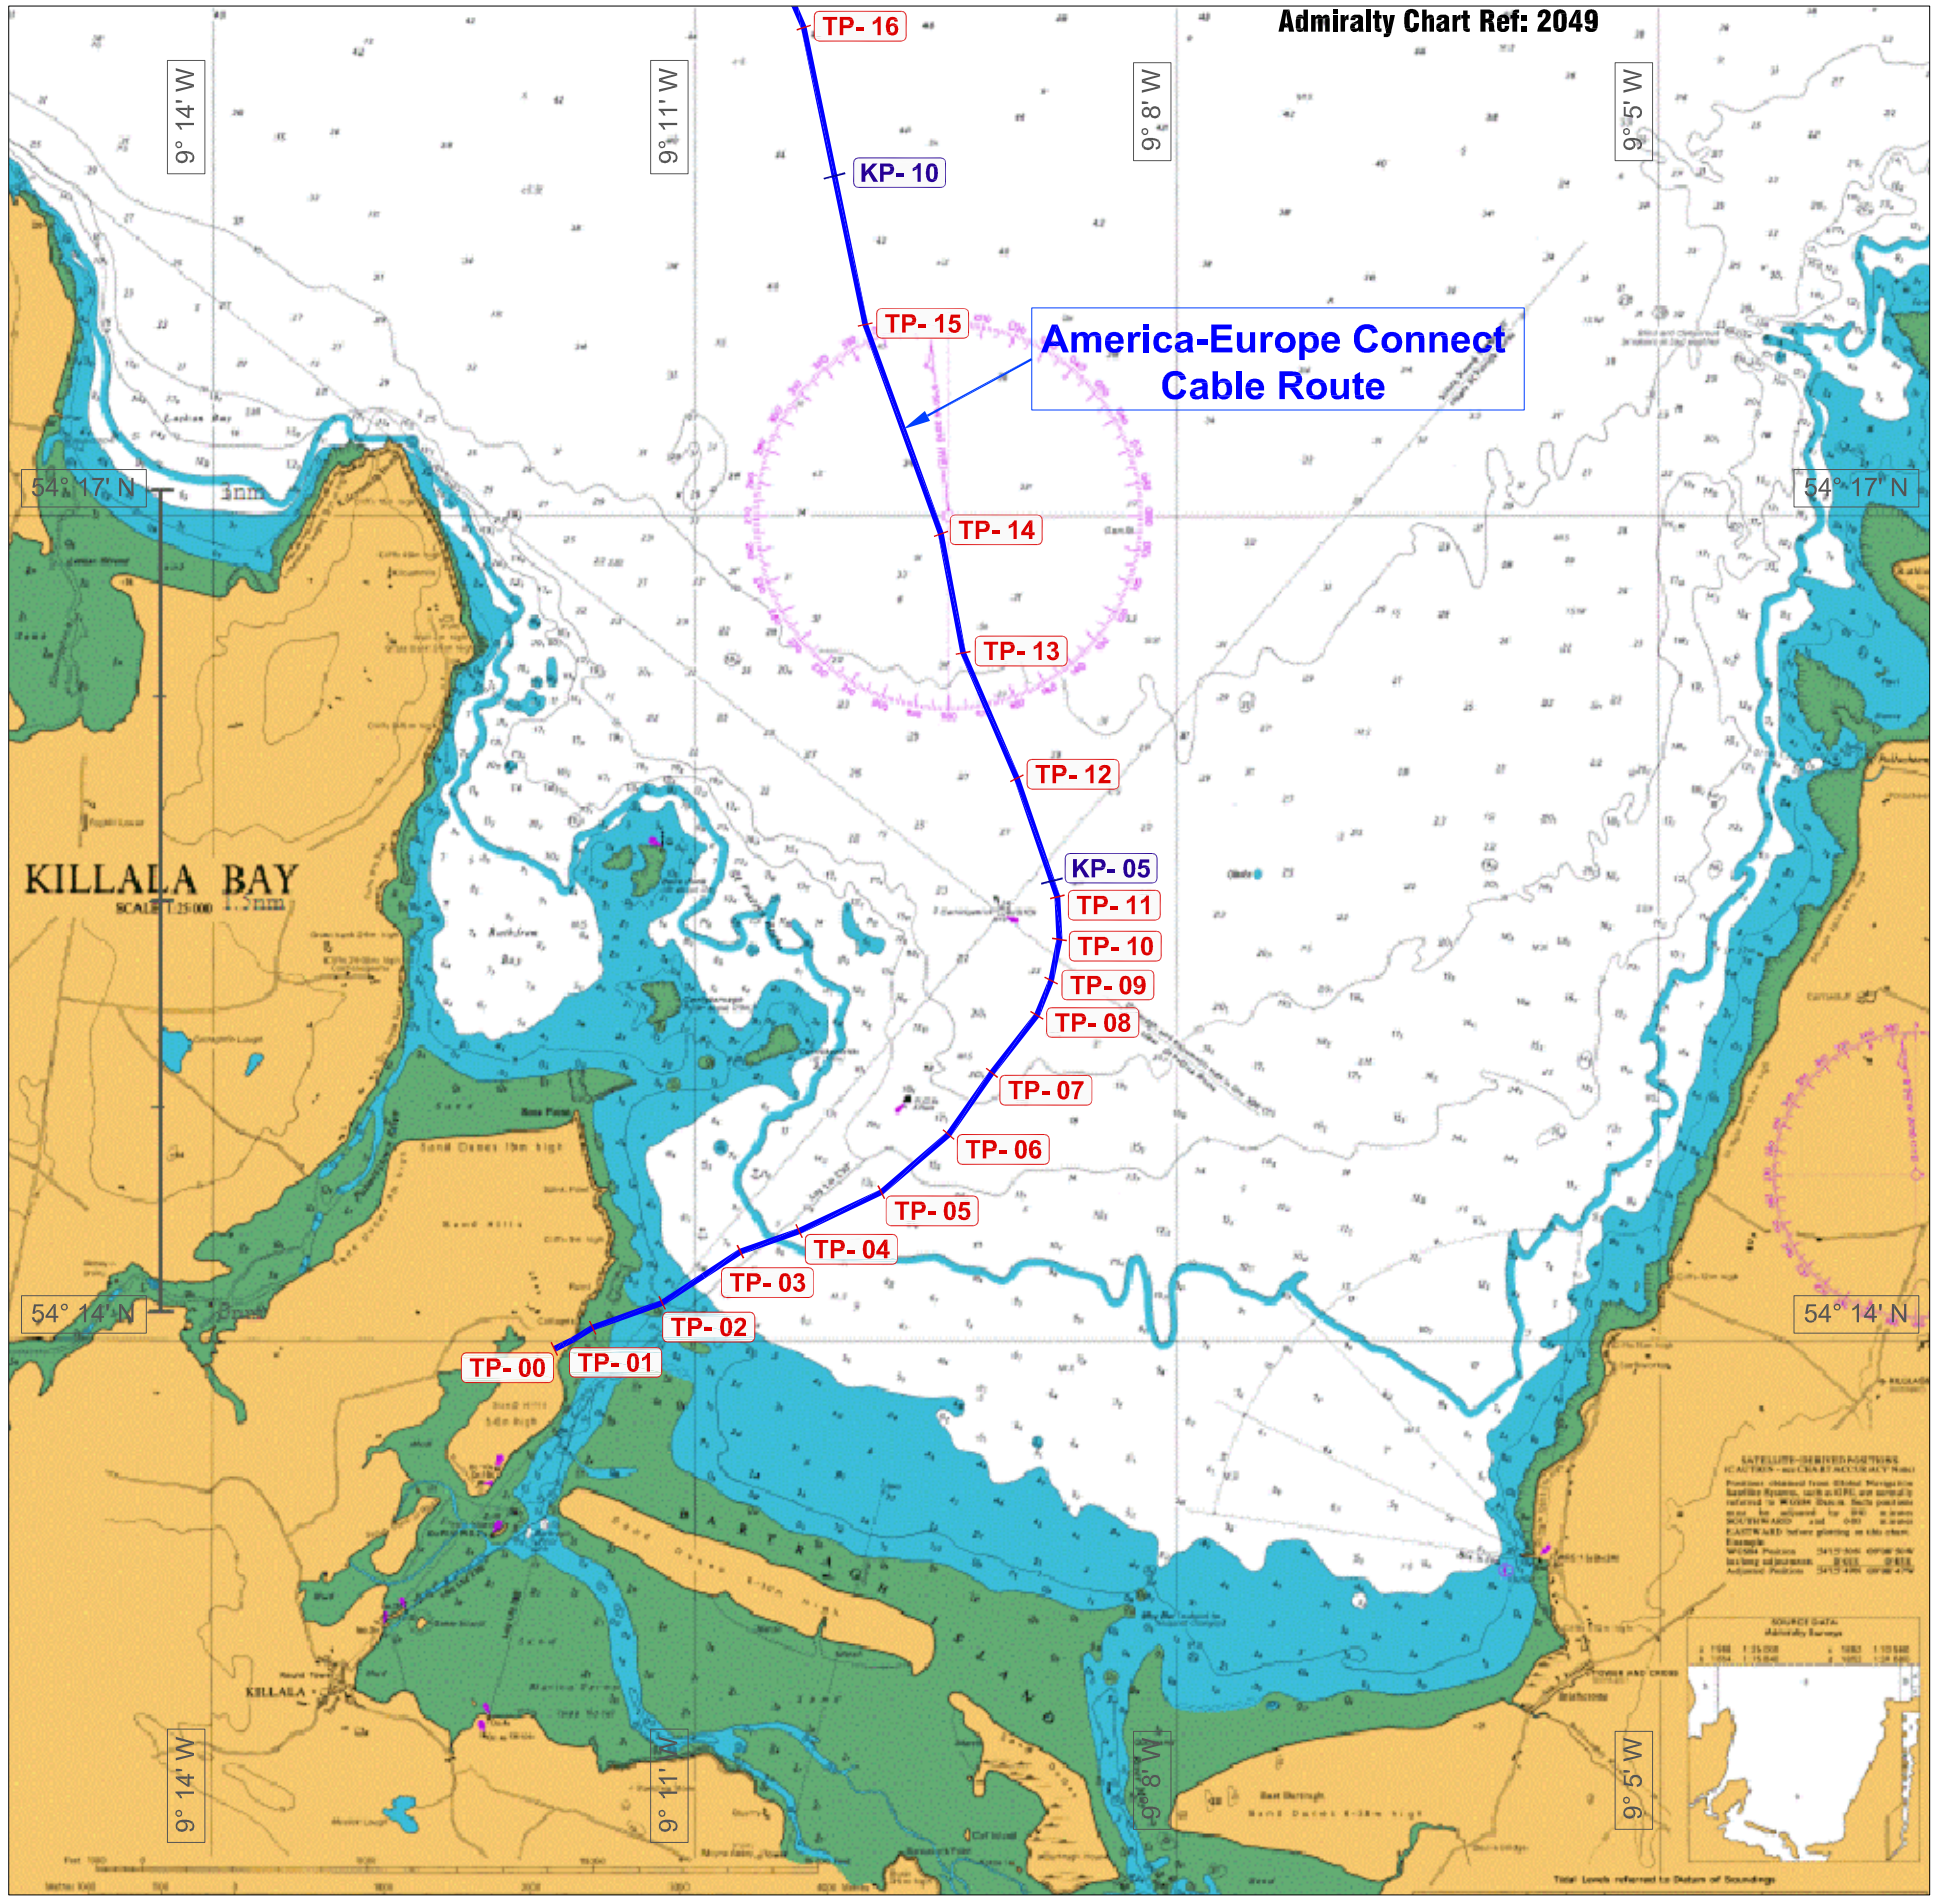

KEY TURNING POINTS (to WGS-84)

Turning Point	Chainage (km)	Latitude	Longitude
TP 0 (BMH)	KP 0.00	54° 13.967' N	9° 11.885' W
TP 1	KP 0.30	54° 14.041' N	9° 11.647' W
TP 2	KP 0.79	54° 14.136' N	9° 11.220' W
TP 3	KP 1.43	54° 14.318' N	9° 10.729' W
TP 4	KP 1.85	54° 14.390' N	9° 10.362' W
TP 5	KP 2.46	54° 14.534' N	9° 9.853' W
TP 6	KP 3.06	54° 14.747' N	9° 9.433' W
TP 7	KP 3.57	54° 14.974' N	9° 9.164' W
TP 8	KP 4.06	54° 15.179' N	9° 8.880' W
TP 9	KP 4.32	54° 15.307' N	9° 8.787' W
TP 10	KP 4.60	54° 15.458' N	9° 8.742' W
TP 11	KP 4.89	54° 15.609' N	9° 8.759' W
TP 12	KP 5.73	54° 16.046' N	9° 9.011' W
TP 13	KP 6.65	54° 16.503' N	9° 9.343' W
TP 14	KP 7.47	54° 16.934' N	9° 9.478' W
TP 15	KP 8.98	54° 17.698' N	9° 9.955' W
TP 16	KP 11.02	54° 18.783' N	9° 10.338' W

Proposed Route of the America-Europe Connect Cable

Scale

1:25,000 @ A1

1:50,000 @ A3

NOTES

TP Turning Point

KP - x Kilometre Point at x km from BMH

CLIENT

America Europe Connect Ltd.

PROJECT

America-Europe Connect Fibre Optic Cable

TITLE

Mainlay Inshore Route

REV	DATE	DESCRIPTION
1	16/02/2015	Licence Applicaton
0	03/09/2014	Initial Drawing

PROJECT NUMBER: 1251

DRAWING NUMBER: 1251-205

DRAWN BY	RR	SCALE
CHECKED BY	TJMcM	
APPROVED BY	TMcM	AS SHOWN

MDM
McMahon Design & Management Ltd.
- Consulting Engineers - Project Managers -
15 The Seapoint Building, Clontarf Road, Dublin 3
Tel: +353-1-8536500 Fax: +353-1-8536800
E-mail: info@mdmengle